



Product Feature:

- E27, AC100-240V input voltage with synchronous charging.
- Automatically convert to powered by battery when no electricity, with emergency lighting function.
- The bulb will be lit up by mounting a starter with a hook, you can also take it down. Portable & suitable for a variety of places.
- Imported SMD2835 LED chip, super bright, soft light beam, no glare.
- Built-in 3.7V/2600mAh Lithium battery, it could last working for 6 hours.
- Equipped with a USB Micro DC inlet for lamp charging.
- Charging with a solar panel is optional.
- USB interface, 5V, 0.5A output, you can connect it to a cellphone for charging.
- Intelligent power supply inside, overvoltage & overcurrent IC protection to ensure safety.
- ABS+PC housing, compact & sturdy, stylish and elegant appearance.
- Private mold, patented appearance design.


Application:

Home & Office Lighting: bedroom, dormitory, study room, office, school, etc.

Emergency Lighting: battery-powered when no electricity.


Portable Lighting: camping, fishing, hiking, picnic, barbecue, booths & stalls in night market, etc.

Solar-powered Lighting: charging with a solar panel is optional, photovoltaic new green energy, eco-friendly.

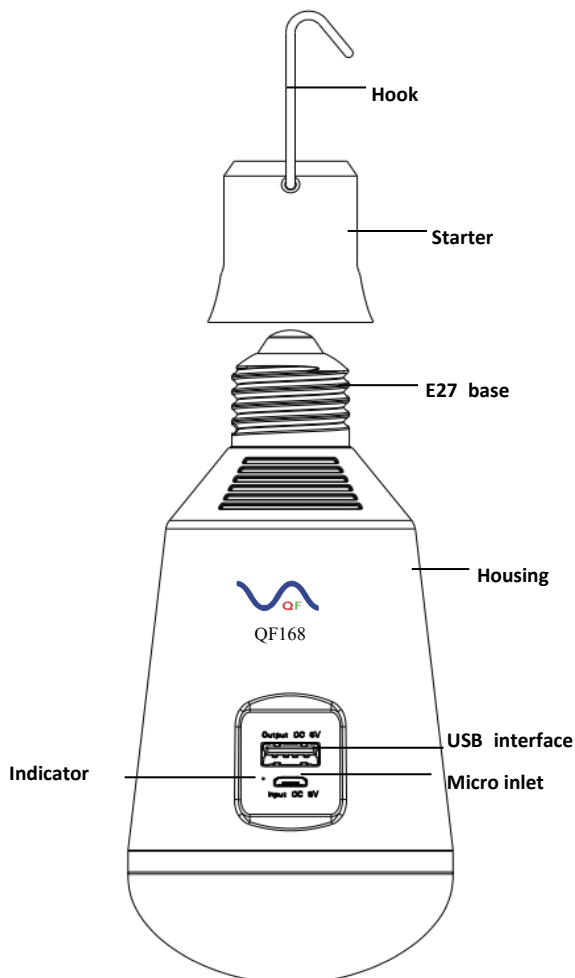



Product Size:

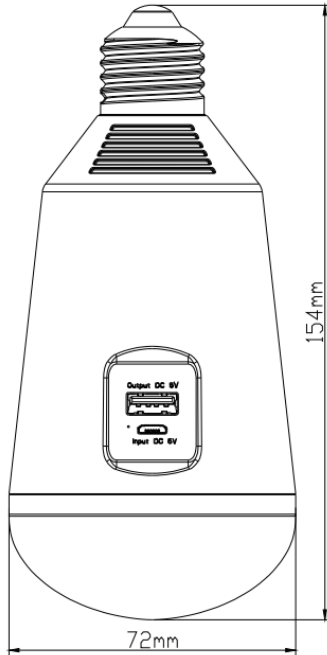

Parameters:

Brand	WQF	Lighting Time	6Hrs
Product Name	Multi-functional LED Bulb	Input Voltage	AC100-240V/DC5V
Model No.	QF-168A	Power	7W
Size	154*72mm	Lumen	560lm
Color	White	CCT	3000K-10000K
Switch	Starter / Hand touching	CRI	80Ra
LED (Chip)	14pcs of SMD2835	Beam Angle	120°
Battery Capacity	2600mAh	Ambient Temp.	-40° — 45°
Battery Lifetime	Charging for more than 1000 times	Warranty	1 Year

Tips:

- When you use it for the first time, please remember to charge it for 4hrs first (with E27AC base or DC/Micro USB input).
- Do not use it under hot, humid environment or to be exposed to the rain to avoid damage.
- Do not let your eyes close to the light beam, so as to avoid visual impairment.
- In order to prevent danger from electric shock and short circuit, please do disconnect the power supply before cleaning and taking the bulb down.
- Please do not put this product close to the fire, high temperature may cause explosion & combustion.
- In the absence of professional and technical personnel, do not repair it or change the battery by yourself. Please return it to the manufacturer or find professionals for handling.

Packing Specification:

- Inner box: 92*92*165 mm
- Carton size: 475*475*350 mm 50pcs/CTN
- N.W.: 180g/piece
- G.W.: 12KG

Accessories:

- LED Bulb*1
- Starter*1
- Hook*1
- USB Cable*1
- User Manual*1

Packaging:

